


三通先导式电磁阀

3 Way Pilot Type Solenoid Valve

TVP342 Series

图形符号



Common Specification (共同规格)

Fluid(流体)	Air & Inert Gases (空气, 惰性气体)
Port Size(接管口径)	Rc(PT) 1/4, G1/4
Ambient&fluid Temp.(周围及流体温度)	5°C~60°C
Response Time(应答时间)	≤5ms(0.5Mpa时)
Power Consumption(电力消耗)	DC: 2.5W AC: 4.5/3.6VA(50/60Hz)
Max.Cycles(最大操作频率)	5c/s(次/秒)
Operating Pressure(使用压力)	0.15~0.9Mpa
Manual Override(手动操作)	Non-locking Push Type (standard)(无锁定式按钮(标准)) Locking Type(锁定型)
Coil Insulation(绝缘等级)	Class F (F级)
Allowable Voltage(容许电压变动范围)	Rated Voltage(额定电压)±10%
Effective Sectional Area(有效截面积)	19mm ² (CV=1.0)
Lubrication(润滑)	Not Required(无需润滑)


How To Order (型号表示方法)

TVP G 342 - 3 DZ - 02 A - S

Port Type 螺纹种类	Voltage 电压	Connection 接电方式	Function 阀形式	Manual Override 手动操作
Nil(空)	3 AC 100/110V 50/60Hz	G Grommet(直接出线式)	A Single Acting(N.C)(单电控常闭型)	Nil(空) Non-locking Push Type (standard)
G G	4 AC 200/220V 50/60Hz	GZ Grommet&LED(直接出线式带指示灯)	B Single Acting(N.O)(单电控常开型)	无锁定式按钮(标准)
	5 DC 24V	D Din Type Terminal(插座式)	D Double Acting(双电控)	S Locking Type(锁定式)
	6 DC 12V	DZ Din Type Terminal(插座式)/LED&Varistor(带指示灯和过压抑制器)		
		DEXT4 Explosion Proof(防爆线圈) Level of explosion-proof IICG EEx IIT4 IICD IP65 T 130°		

Dimensions(mm)(外形尺寸图(毫米))

TVP342-□G-A/B

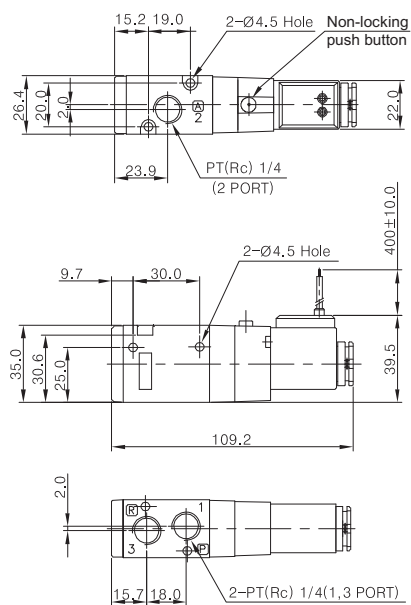

TVP342-□D-D

